

NEW 2024



# F23

## Optical Angle

## Adjustable Cylinder

光学角度調整可能シリンダー

5 CCT Selectable, 3 Wattage Selectable, Indirect/Full/Direct Light Beam, Light Beam Adjustable, Inner Photocell

5段階調光可能、3段階消費電力選択可能、間接/全/直接照明ビーム、光束調整可能、内蔵フォトセル


光線角度調整可能

# Beam Angle Adjustable



- ▶ You can also control the beam angle independently by two knob


2つの調節ノブで  
照射角度を個別に  
制御可能

上方照射  
Up-Lighting Angle

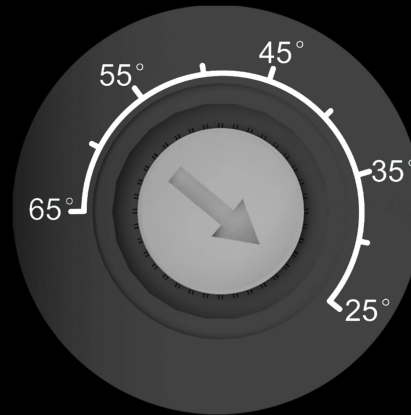

Down-Lighting Angle  
下方照射

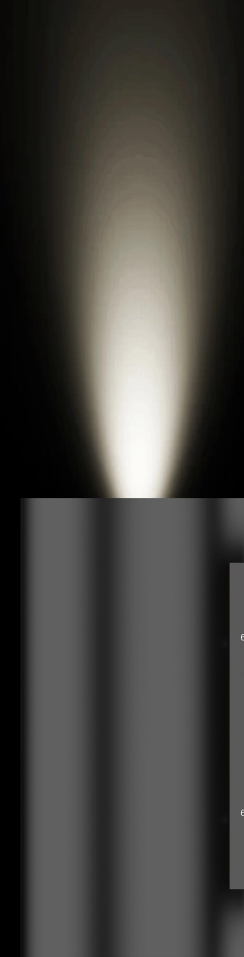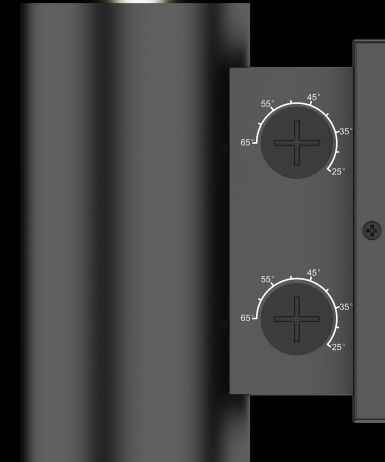

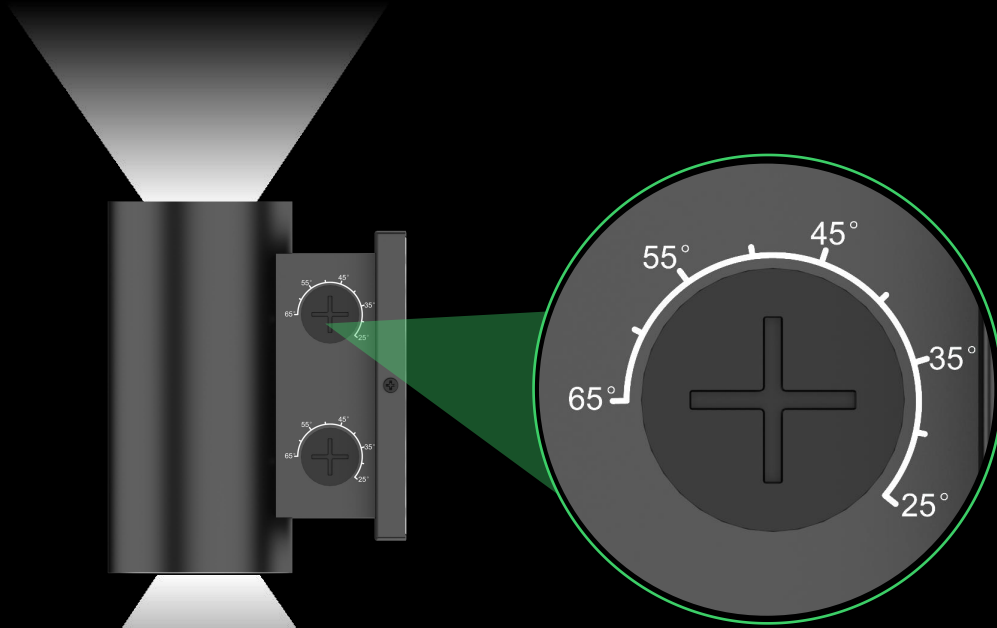

数秒で照射角度を変更可能  
**Change the beam angle in a few seconds.**




**Takes longer time, difficult to ensure structural integrity and waterproof performance.**  
時間を要するため、構造の完全性と防水性能の確保が困難




# 5cct

## Selectable


5種類色温度調整可能

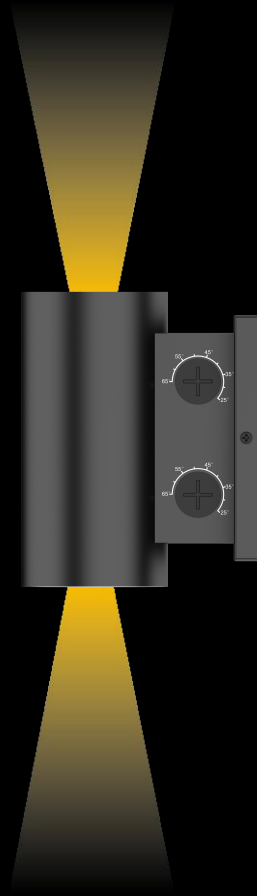


2700K

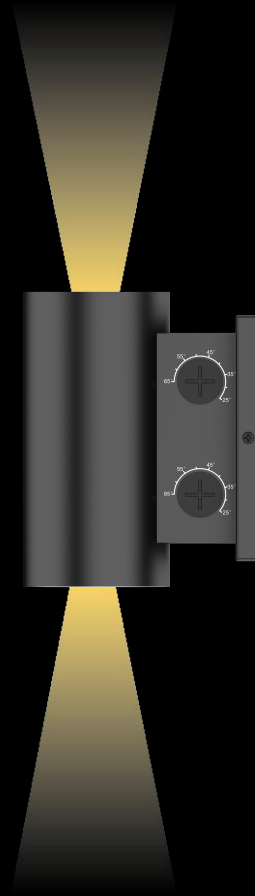


3000K

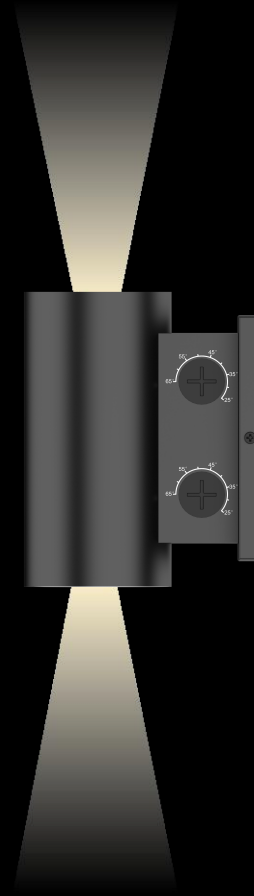

3500K

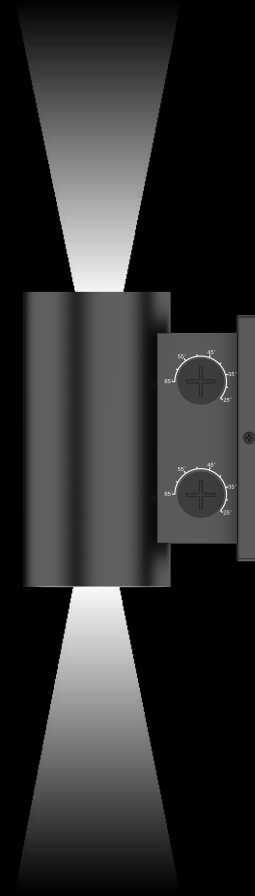

4000K

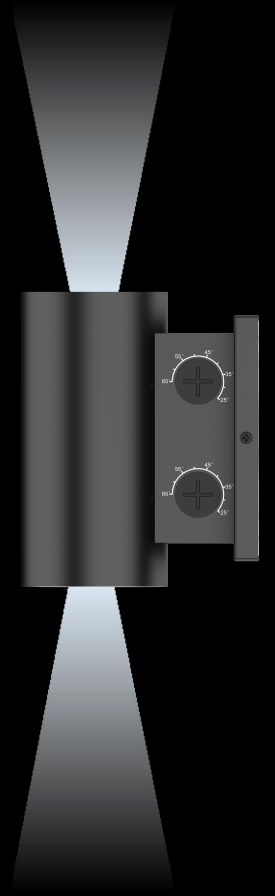


5000K


# 3Wattage

## Selectable


3段階消費電力選択可能

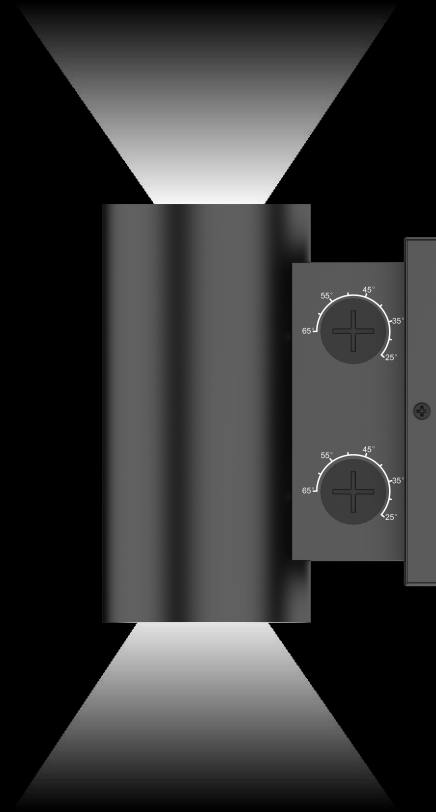

20W

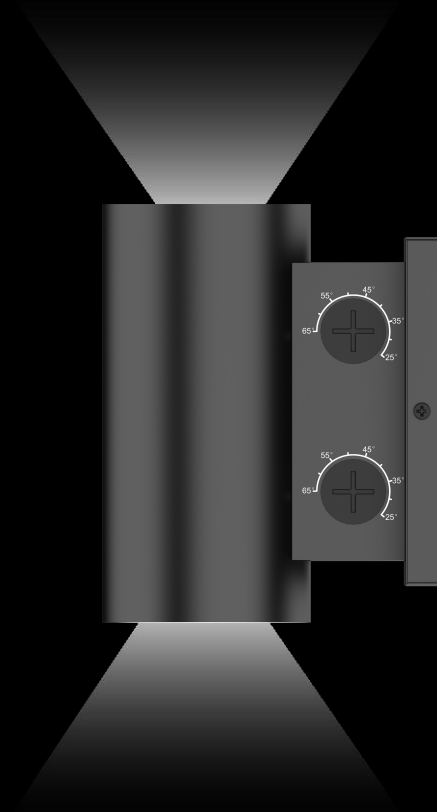


15W

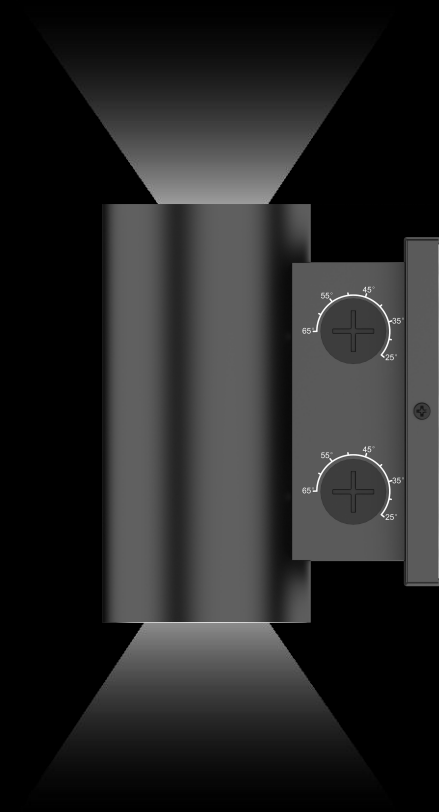

10W

# Up/Full/Down Light Beam

上方/全方向/下方 光束

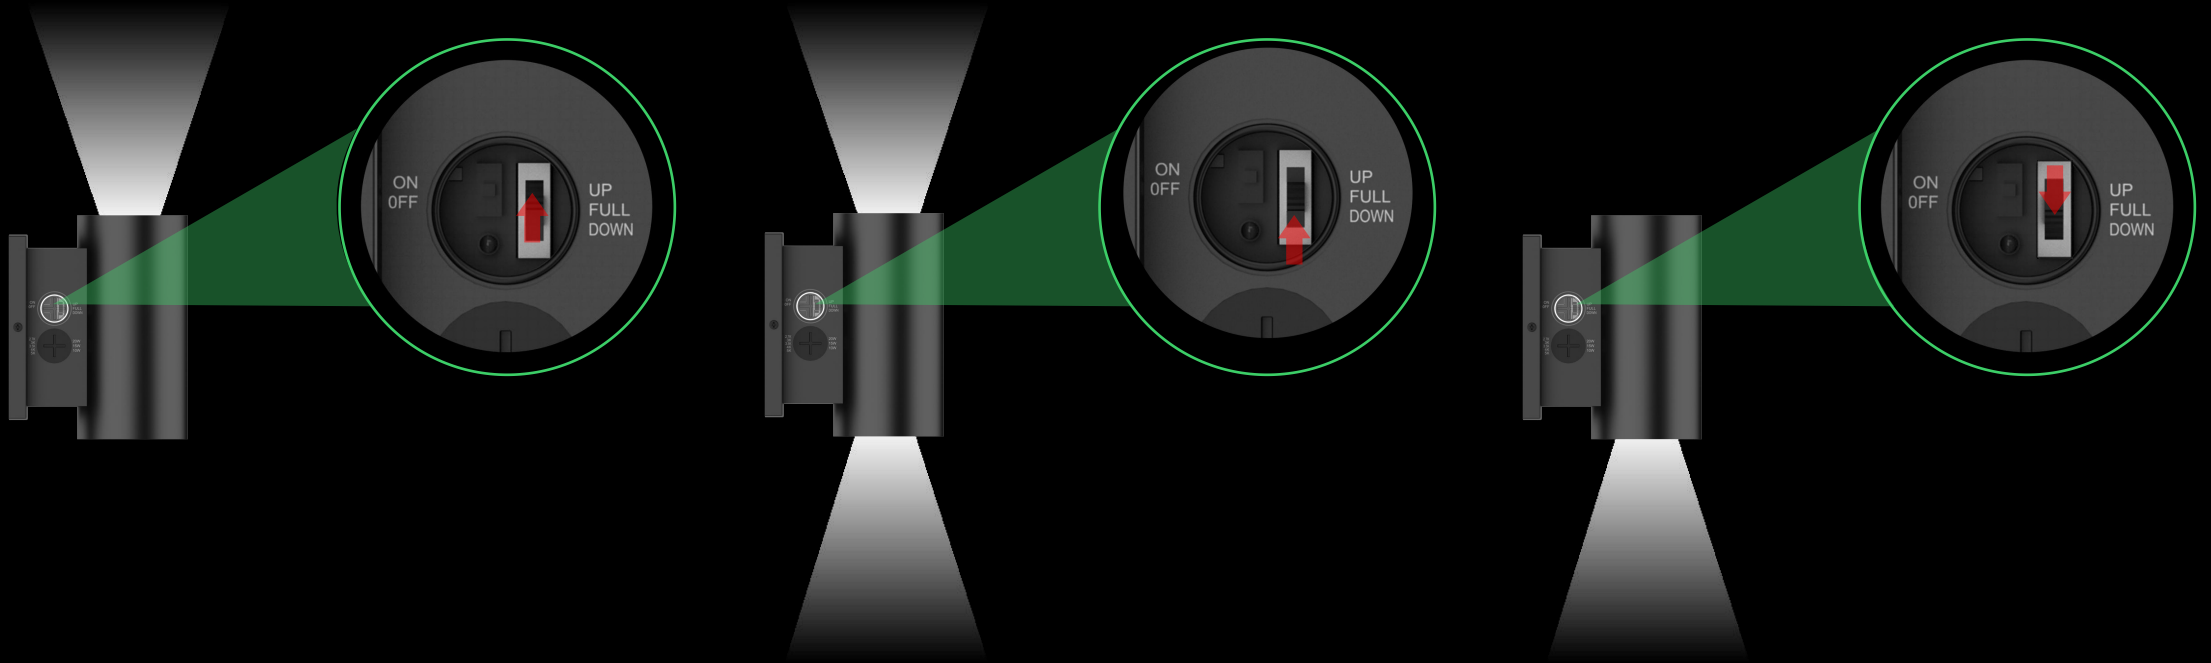

## 4大調整機能の統合

# Integration of Four Major Adjustment Functions



Photocell  
ON/OFF

光センサー

Up/Full/Down  
Light Beam


上方/全方向/下方  
光束


5 CCT  
Adjustable

5種類  
色温度  
調整可能



3 Wattage  
Adjustable

3段階  
消費電力  
選択可能


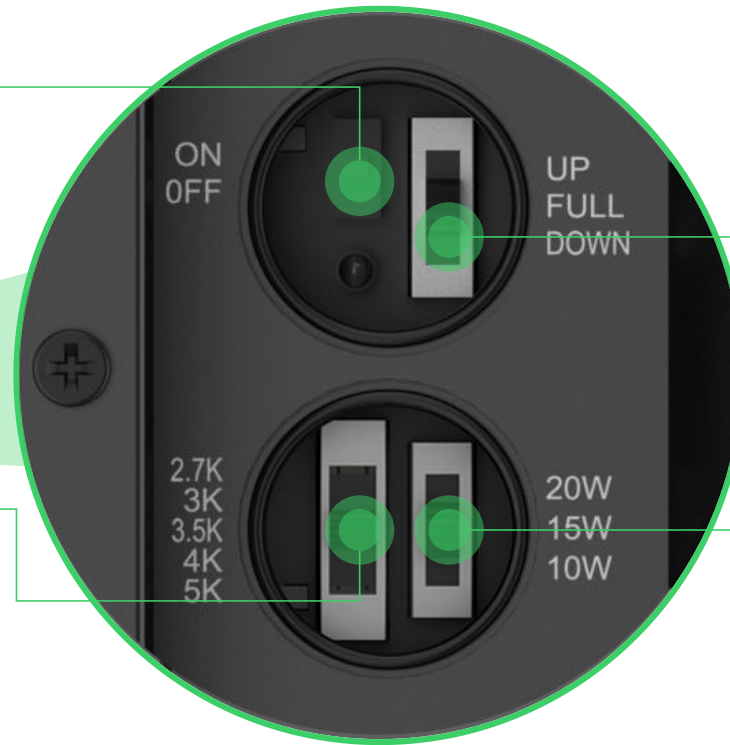


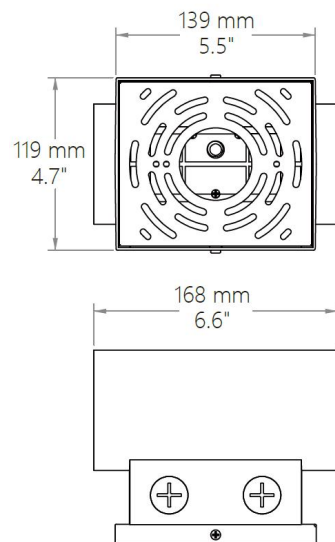

F23-20W-01

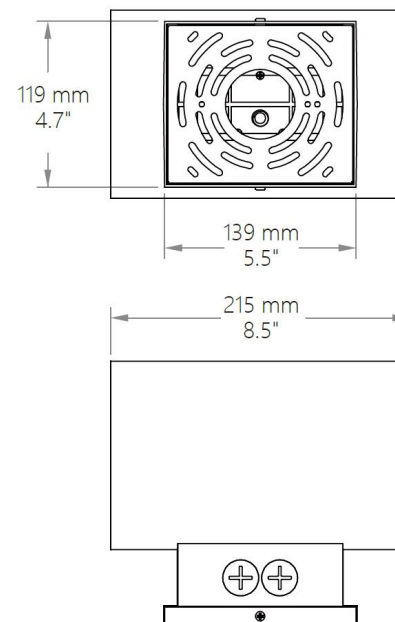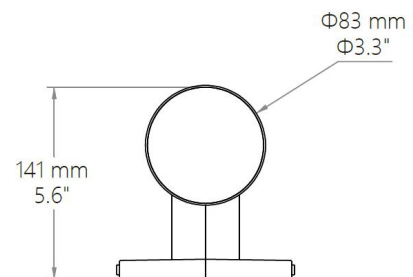

F23-40W-01

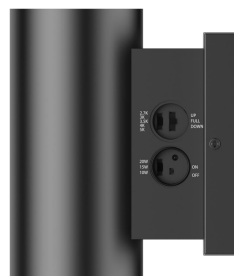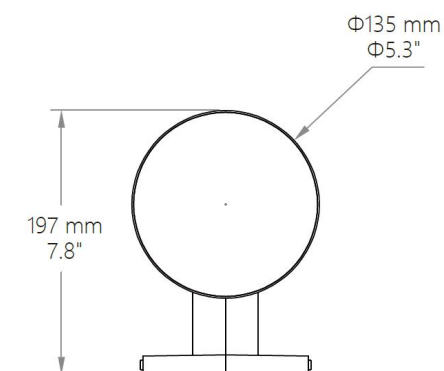

4"



6"



仕様

## F23 Specifications



型番 Model: F23-20W-01 / F23-40W-01

入力電圧 Voltage: 120-240VAC

消費電力 Wattage: 20W(10W/15W/20W) 40W(20W/30W/40W)

効率 Efficiency: 89Lm/W ~ 104Lm/W

ルーメン Lumen: (20W)890~2080 LM / (40W)1780 - 4160 LM

色温度 CCT: 2700K/3000K/3500K/4000K/5000K

照射角度 Distribution Pattern: (20W)25° to 65° / (40W) 40° to 85°

# Please Buy From



Please Contact Us For More Details  
About Business Cooperation

 [info@szguanke.com](mailto:info@szguanke.com)

 [www.szguanke.com](http://www.szguanke.com)